
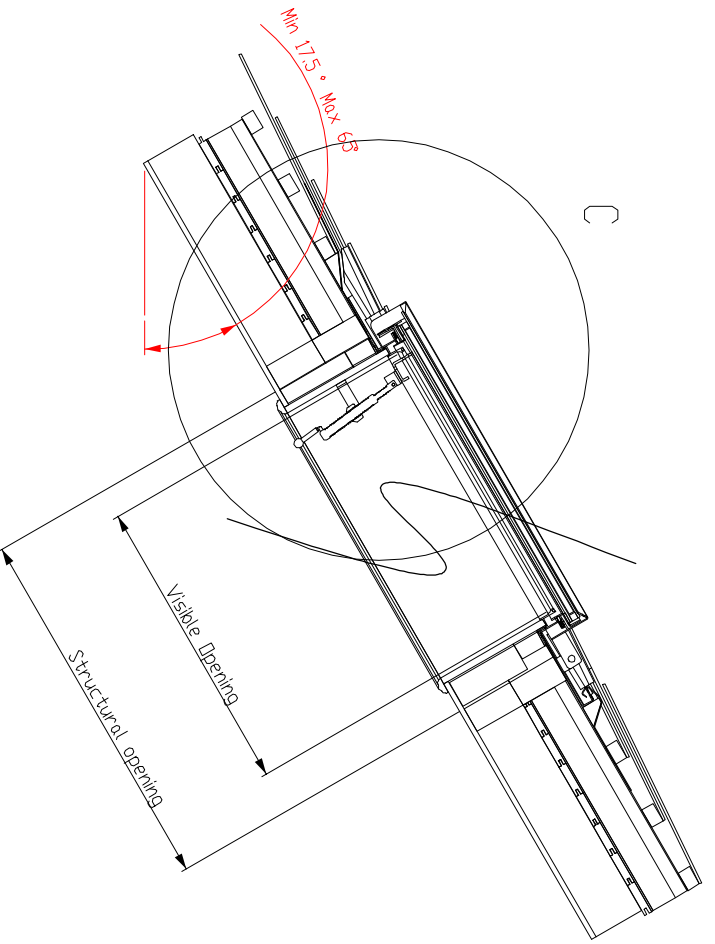


Disclaimer
 Please note that these drawings do not constitute a structural support proposal. Sufficiency of structural supports to be checked by rooflights purchaser's structural consultant.
 The information contained within this drawing is Copyright & Design right of The National Dometlight Company.

Tiling fillet:
 Use hardwood or treated softwood and make a fillet long enough to give good downward and outward tilt.

Lead Flashing:
 Use code 4 lead sheet to Cill in severer exposures clip lead flashing down at centers and consider clipping long enough to give the triple lap to the tiles below.

Silicone bedding:
 Apply a thick, continuous bead of low modulus neutral cure silicone along the width of the Cill Flashing in a position where it will be covered by the Cill flange of the rooflight. Apply the silicone just prior to fitting the rooflight into position.

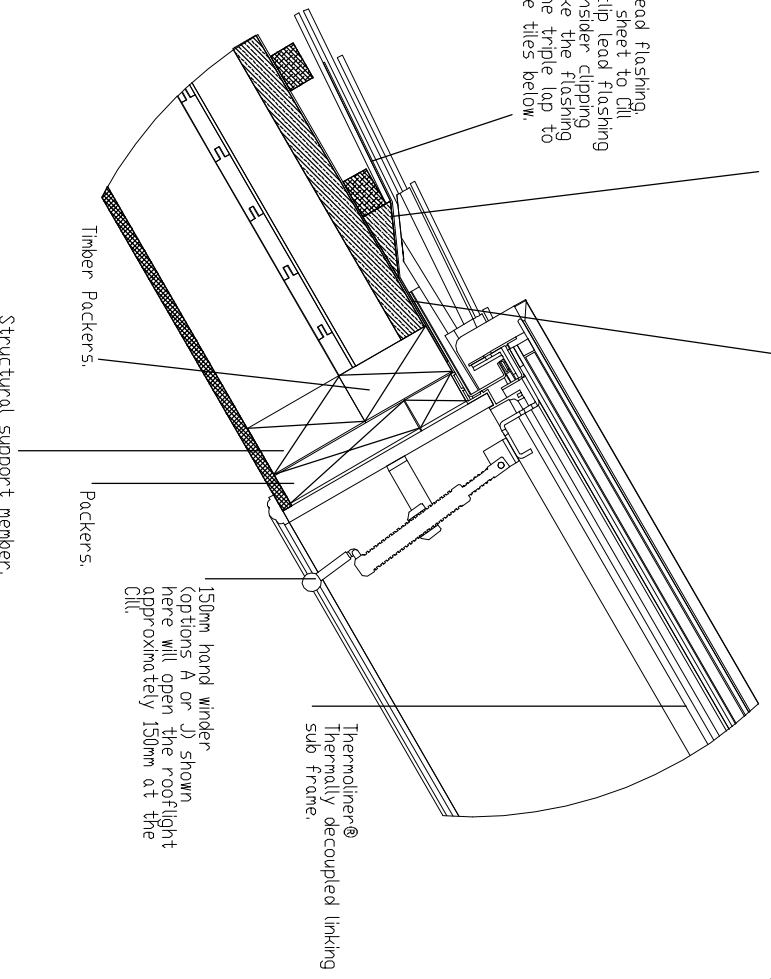

With Thermoliner®
 Patent No. 230-6545
 Not to scale. If in doubt ask



DO NOT SCALE DRAWING

REVISION

The National Dometlight Company
 Pyramid House, SE Gullford Road,
 Upton, Essex, Saffron Walden, Essex,
 UK. Tel: 01276 431533
 www.nationaldometlight.com

DRAWN BY: JF	DATE: 25-03-04	TITLE: Installation Detail.
CHECKED BY: PD		DWG NO: CS - 007/05
MATERIAL: 		A3