

Factory glazed frame constructed from extruded aluminium profile, thermally broken with polyamide insulation sections. Supplied as standard polyester powder coated to dual colour finish. RAL 9010 (White) to internal section and RAL 9005 (Black) to external section.

Extruded aluminium 'clip-on' capping profile, supplied as standard polyester powder coated to RAL 7015 (Slate Grey).

All fixings concealed beneath external capping. (All fixings A2 stainless steel)

Roof membrane dressed onto upstand


26mm Insulating glass unit, comprising of:  
 4mm Clear toughened outer pane,  
 16mm Argon filled cavity (Silicone Sealed),  
 6mm Clear toughened super low-E coated inner pane.  
 (Centre pane U-value 1.1 W/m<sup>2</sup>K)

Plasterboard engages with skylight framework at unique Decorstop detail, minimising internal sight lines.

Fully insulated upstand supplied by Skyglaze. Constructed from ZNO, skins of 9mm Stirling board, white wood framing and Iso wool insulation.

12.7mm Plasterboard and Skim (By Others)

Overall Skylight Dimensions Taken From Internal Structural Opening

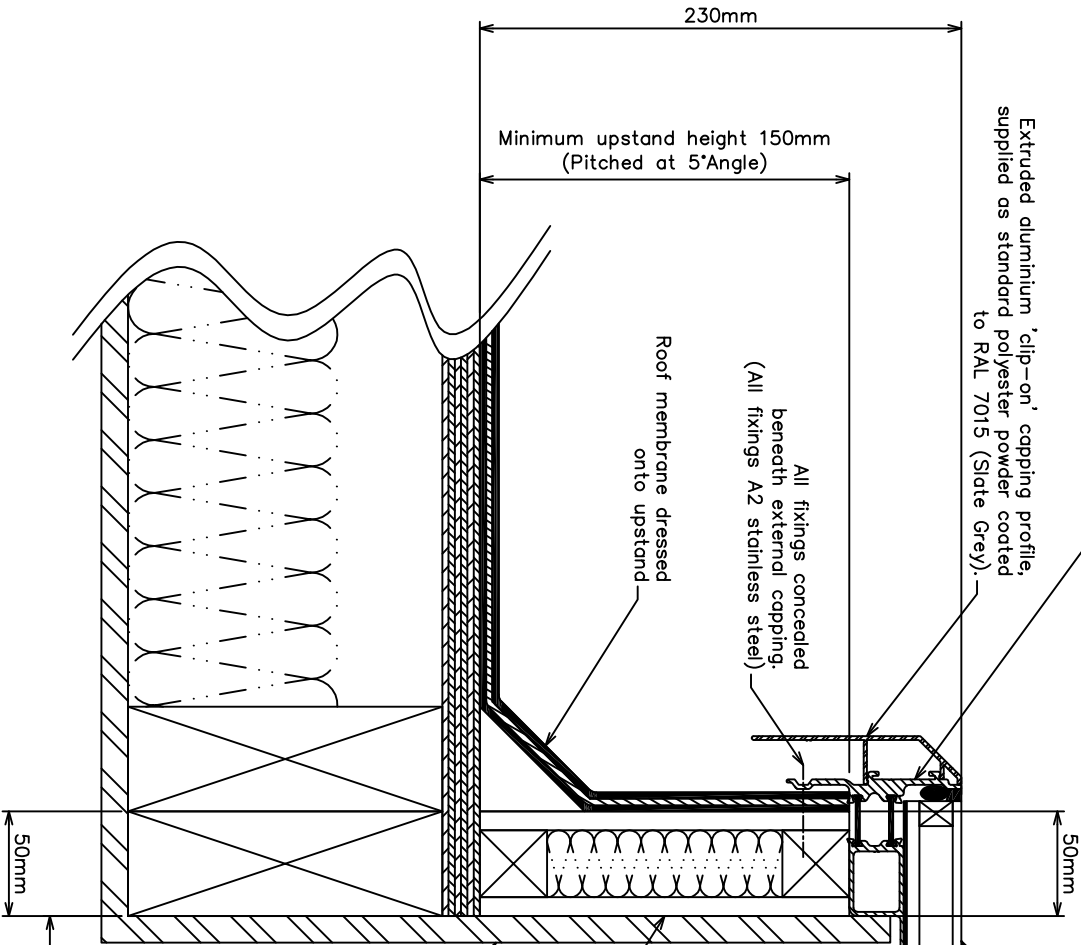

Section Through Upstand/Framework Construction

Rev:	Description:	By:	Date:

**Tolerances:**

X	± 0.5mm
X X	± 0.25mm
X X X	± 0.10mm
angles	± 0.5°

**DO NOT SCALE**

**Drawn:** JB  
**Date:** Oct 2005

**Third angle projection**

<b>Finish:</b>	Not Applicable
<b>Materials:</b>	Not Applicable
<b>Quantity:</b>	Not Applicable

<b>Project Ref:</b>	Skyglaze Fixed
<b>Description/Location:</b>	
<b>Dwg No:</b>	SG-STD-001